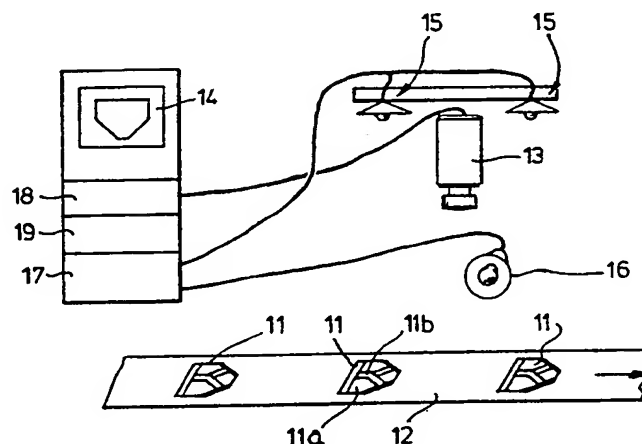


**PCT**WORLD INTELLECTUAL PROPERTY ORGANIZATION  
International Bureau

## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<b>(51) International Patent Classification <sup>5</sup> :</b>  <b>G01N 21/84, 33/36</b>	<b>A1</b>	<b>(11) International Publication Number:</b> <b>WO 92/03721</b>  <b>(43) International Publication Date:</b> <b>5 March 1992 (05.03.92)</b>
<b>(21) International Application Number:</b> PCT/GB91/01414 <b>(22) International Filing Date:</b> 20 August 1991 (20.08.91)  <b>(30) Priority data:</b> 9018470.6                      22 August 1990 (22.08.90)                      GB  <b>(71) Applicant (for all designated States except US):</b> LEICESTER POLYTECHNIC [GB/GB]; P.O. Box 143, Leicester LE1 9BH (GB).  <b>(72) Inventors; and</b> <b>(75) Inventors/Applicants (for US only) :</b> NORTON-WAYNE, Leonard [GB/GB]; ABBASSZADEH, Siavash [IR/GB]; Leicester Polytechnic, P.O. Box 143, Leicester LE1 9BH (GB).  <b>(74) Agents:</b> McNEIGHT, David, Leslie et al.; McNeight & Lawrence, Regent House, Heaton Lane, Stockport, Cheshire SK4 1BS (GB).		<b>(81) Designated States:</b> AT (European patent), AU, BB, BE (European patent), BF (OAPI patent), BG, BJ (OAPI patent), BR, CA, CF (OAPI patent), CG (OAPI patent), CH (European patent), CI (OAPI patent), CM (OAPI patent), DE (European patent), DK (European patent), ES (European patent), FI, FR (European patent), GA (OAPI patent), GB (European patent), GN (OAPI patent), GR (European patent), HU, IT (European patent), JP, KP, KR, LK, LU (European patent), MC, MG, ML (OAPI patent), MR (OAPI patent), MW, NL (European patent), NO, PL, RO, SD, SE (European patent), SN (OAPI patent), SU*, TD (OAPI patent), TG (OAPI patent), US.  <b>Published</b> <i>With international search report.</i>

**(54) Title:** INSPECTING GARMENTS**(57) Abstract**

There is disclosed a method and apparatus for automatically inspecting garments, which have panels separated by seams, by forming an image from the garment, identifying the seams on the image, and inspecting the panel areas individually.

# + DESIGNATIONS OF "SU"

Any designation of "SU" has effect in the Russian Federation. It is not yet known whether any such designation has effect in other States of the former Soviet Union.

## *FOR THE PURPOSES OF INFORMATION ONLY*

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	ES	Spain	MG	Madagascar
AU	Australia	FI	Finland	ML	Mali
BB	Barbados	FR	France	MN	Mongolia
BE	Belgium	GA	Gabon	MR	Mauritania
BF	Burkina Faso	GB	United Kingdom	MW	Malawi
BG	Bulgaria	GN	Guinea	NL	Netherlands
BJ	Benin	GR	Greece	NO	Norway
BR	Brazil	HU	Hungary	PL	Poland
CA	Canada	IT	Italy	RO	Romania
CF	Central African Republic	JP	Japan	SD	Sudan
CG	Congo	KP	Democratic People's Republic of Korea	SE	Sweden
CH	Switzerland	KR	Republic of Korea	SN	Senegal
CI	Côte d'Ivoire	LI	Liechtenstein	SU <sup>+</sup>	Soviet Union
CM	Cameroon	LK	Sri Lanka	TD	Chad
CS	Czechoslovakia	LU	Luxembourg	TG	Togo
DE	Germany	MC	Monaco	US	United States of America
DK	Denmark				

INSPECTING GARMENTS

This invention relates to inspecting garments and particularly garments such as Y-front underwear comprising garment panels separated by seams.

Inspection of mass-produced garments such as socks and underwear is a particularly labour-intensive operation. The garments are inspected, currently, by eye for dimensional defects and to check that the correct size label is applied, for making-up defects - badly sewn or missing seams, for example, for labelling defects, colour variations and fabric defects such as holes, stains, printing defects, colour defects and others. The number of personnel engaged on such inspection quite often substantially exceeds the number engaged in production.

Automatic inspection, using machine vision, is clearly desirable. The difficulty is to develop a methodology by which images can be formed and inspected automatically, sufficiently rapidly to keep pace with production, with a high detection efficiency and a low rejection rate for fault-free garments, using equipment which is not prohibitively expensive.

The invention comprises a method for automatically inspecting garments which have panels separated by seams, comprising the steps of :-

- 5           forming an image from the garment,
- identifying the seams on the image, and
- inspecting the panel areas individually.
- 10

The invention is particularly applicable to garments in which the seams themselves have width, when the seams may also be inspected.

- 15           Seams which stand proud of the adjacent panels - more generally, seams which have a z-coordinate with respect to the x,y coordinates of the garment surface - may be detected by shadows and highlights from oblique illumination.

20

The method of the invention may be adapted for inspecting Y-front underwear, which comprises panels edged with wide, raised seam and waistband structures, when it may comprise the steps of :-

25

            forming an image of the front of the garment laid flat,

- 3 -

locating on the image the outline of the garment,

locating on the image the edges of the wide,  
raised seam and waistband structures, and

5

inspecting the panels and the wide, raised seam  
and waistband structures located on the image  
for faults.

10

The garment may be measured for sizing from the  
image of the front of the garment, and may be illuminated  
with front lighting to form this image, after which the  
garment is illuminated with oblique lighting to locate  
the edges of the wide, raised seam and waistband  
structures and images thereof are superimposed on the  
image formed by front lighting.

15

The invention also comprises apparatus for  
automatically inspecting garments which have panels  
separated by seams comprising :-

20

imaging means for forming an image of the  
garment,

25

seam identifying means for identifying the seams  
on the image formed by the imaging means, and

panel inspection means for individually inspecting the panel areas on the said image.

5 The imaging means may comprise an area scan video camera aimed at a background against which the garment can be laid flat and front and oblique lighting for garments so laid against the background.

10 The seam identifying means may comprise image processing means identifying highlights and shadows on an obliquely illuminated image and superimposing images thereof on a front-lit image of the garment.

15 The panel inspection means may comprise image processing means adapted to identify a panel on the image and process the same to detect faults therein according to predetermined criteria and to activate alarm or garment rejection arrangements upon fault detection.

20 The panel inspection means may be arranged to process each of a plurality of panels of the image sequentially. Fault recording means may be adapted to record the occurrences of faults associated with each of  
25 a plurality of panels on a batch inspection of similar garments. The apparatus may then also comprise heuristic control means arranging the said plurality of

panels in a sequence for inspection according to the incidence of faults for each panel recorded as the batch inspection processes.

5                   One embodiment of apparatus and a method for automatically inspecting garments according to the invention will now be described with reference to the accompanying drawings, in which :-

10                   Figure 1    is a general view of the apparatus;

                  Figure 2    is a first image produced by the apparatus of Figure 1;

15                   Figure 3    illustrates a processing step in assessing the dimensions of a garment from the first image;

                  Figure 4    is a second image produced by the apparatus;

20

                  Figure 5    illustrates a processing step in determining the positions of seams in the garment from the second image;

25                   Figure 6    illustrates the step of superimposing seams located from the second image on the first image;

and Figure 7 illustrates a step in the fault detection operation.

5 The drawings illustrate automatic garment inspection apparatus engaged in the inspection of Y-front underwear 11 presented laid flat on a conveyor 12 passing beneath an area scan video camera 13 which images each garment in turn for processing in image processing apparatus 14.

10

Y-front underwear poses special problems for automatic, machine-vision inspection, inasmuch as it comprises panels 11a with intervening seams 11b. Treating the garment as a single panel would require the signals produced by the seams to be somehow ignored. Matching the image to a standard template does not take account of the fact that textile processes do not result in uniformly sized or configured garments.

15

20 The drawings illustrate a method in which the seams 11b are identified and the panel areas 11a inspected individually.

25

In Y-front underwear, the seams 11b themselves have width, and the method also allows the seams 11b to be inspected.



If the seams 11b could be relied upon to have a different colour or a different texture from the panels 11a, such difference could be used to identify the seams. However, generally speaking, the seams are identical  
5 with or very similar in appearance to the panels. Instead, in the preferred method of the invention, use is made of the fact that Y-front garment seams stand proud of the adjoining panels, that is to say they have a z-coordinate with respect to the x,y-coordinates of  
10 the garment surface.

It will be understood that the garments 14 have a front and a back and that both may require to be inspected. This is not necessarily the case - pre-  
15 inspection of fabric may reduce the incidence of fabric faults to negligible proportions, and thus the only faults which require to be detected are making-up faults, which may be found to occur almost entirely on the complicated front and hardly ever on the much  
20 simpler back of the garment. If both sides have to be inspected, however, the procedure will be repeated, mutatis mutando, with the garments, turned over. The present description will be with regard to inspection of the front. However, with some designs of Y-front  
25 underwear, laying the garment face up exposes the leg-opening seam all the way round, and then inspecting the reverse side may be unnecessary.

An image is first formed of the garment 11 using the front lighting set-up 15. This image - which might be averaged over two or more frames for noise-reduction purposes - is stored in a frame store of the apparatus 14 and segmented using an appropriate grey-scale threshold so that the image is uniformly dark against a bright background as seen in Figure 2 - or the other way round, of course, whichever is desired.

The outline of this image is then determined using a robot edge-follower program in which a notional robot group of pixels is scanned across the image until dark pixels are encountered and the group is then moved and rotated so as to maintain both light and dark pixels in its composition thus tracing out the edge of the image. The position of each step is stored so that at the end of the edge-tracing operation there is a collection of pixels of the image  $(x_i, y_i)$  that define the edge.

The centroid  $(X, Y)$  of the image - Figure 3 - is determined as

$$X = 1/N \sum_{i=1}^N x_i, \quad Y = 1/N \sum_{i=1}^N y_i$$

- 9 -

where N is the number of points on the periphery, which is a reasonable approximation from a simple and rapid calculation.

- 5                   The distance from the centroid (X,Y) of each edge pixel ( $x_i, y_i$ ) is calculated as

$$D_i = \sqrt{[(X - x_i)^2 + (Y - y_i)^2]}$$

- 10                   The image is then divided from the centroid into six areas a, b, c, d, e, f, each containing a single corner A, B, C, D, E, F, which is the point in the area furthest from the centroid. Each corner A, B, C, D, E, F is found by finding the highest  $D_i$  encountered in
- 15                   the course of stepping around all the edge points of the area.

- Once the coordinates ( $x_A, y_A$ ), ( $x_B, y_B$ ), ( $x_C, y_C$ ), ( $x_D, y_D$ ), ( $x_E, y_E$ ), ( $x_F, y_F$ ) of
- 20                   the corners A, B, C, D, E, F have been found, the following dimensions are calculated :-

Side leg including waistband

$$A-C = \sqrt{[(x_A - x_C)^2 + (y_A - y_C)^2]}$$

25

Leg opening

$$C-E = \sqrt{[(x_C - x_E)^2 + (y_C - y_E)^2]}$$

- 10 -

Crotch width

$$E-F = \sqrt{[(x_E - x_F)^2 + (y_E - y_F)^2]}$$

Waist

5

$$B-A = \sqrt{[(x_B - x_A)^2 + (y_B - y_A)^2]}$$

10 These dimensions are used to check that a garment of a given size is within tolerances or to separate garments of different sizes and to check that all measurements are within tolerances for the size so determined.

15 The conveyor 12 is conveniently stopped for the imaging so that once the first image referred to above has been captured using the front light arrangement 15, and the image sent for processing as described, the front illumination can be switched off and the oblique illumination 16 switched on, for a second, oblique-lit image to be formed. Since the seams 11b are raised this

20 oblique lighting will highlight the edge of any seam nearest the light source and cast a shadow from the other edge. The position of the light source will be chosen with regard to the way the garments 11 are so presented on the conveyor 12 as to ensure that there is

25 always a highlight and a shadow for each seam. A second image is now captured under this oblique illumination which contains information about the structure of the

- 11 -

garment within its periphery - the raised, wide seam and waistband structure. Figure 4 shows such a second image, with highlights 41 and shadows 42 indicating the edges of the seams 11b and the waistband.

5

The highlights 41 and shadows 42 are processed separately. The image (or rather a copy of it), to process the shadows, is grey-scale segmented using an appropriate threshold to leave just shadows information.

10 Since the shadows will not necessarily be sharp and since there may be spurious shadows from other parts of the garment, the image is further processed appropriately to sharpen up the shadows and eliminate spurious information. One way to do this is to isolate features,

15 starting e.g with vertical features, of which, in Y-front underwear there should be only one, namely the shadow of one edge of the centre vertical seam. A straight line is fitted to this feature by defining a box including the uppermost, lowermost and extreme

20 lateral points and testing straight lines passing through the box, generated automatically by a series of equations to select the one that passes through the most data points - using a suitable segmentation threshold level to separate the shadow information will result in

25 that information being a set of isolated data points rather than an extended area, as shown in Figure 5, which shows a trial line 51 being fitted to a set of shadow points 52 on an inclined seam edge.

- 12 -

This process is repeated for all the other shadow sections until an image can be assembled of the sharpened-up shadow region. The same is then done for the highlights, so as to produce a diagram like Figure 6 showing a representation on the image first captured.

The image is now divided up into sections  $S_1$ ,  $S_2$  etc boarded either by an edges, shadows and highlights. Each section  $S_1$ ,  $S_2$  etc, whether it be of a panel 11a or a wide seam 11b, is then isolated and subjected to fault detection processing by image segmentation using an appropriate threshold level, and filtering or any other appropriate technique to check for extended areas of differentiation from the threshold background which indicate fabric and/or making-up faults. Figure 7 shows the waistband area  $S_1$  so separated for the fault detection operation, the remainder of the sections  $S_2$ - $S_7$  being examined in turn.

20

Of course, if a fault is detected, further inspection might be regarded as futile, and the inspection process might usefully be terminated with the apparatus activating an alarm or rejection mechanism (Figure 1).

25

It may be found that one region has significantly more faults than others, and it will advantageously be

- 13 -

arranged that the apparatus stores statistics from which this can be determined and which can be used to determine the ranking order for the panels 11a and 11b of the garment 11 for fault occurrence. Then the

5 section with the highest number of faults can be selected to be examined first into the fault detection stage, the arrangement operating thus heuristically. Of course, the thus collected statistics may also be used to determine which area of manufacture must be tackled

10 first from the point of view of fault elimination.

CLAIMS

1. A method for automatically inspecting garments,  
which have panels separated by seams, comprising the  
5 steps of :-

forming an image from the garment,  
identifying the seams on the image, and  
10 inspecting the panel areas individually.

2. A method according to claim 1 for garments, in  
which the seams themselves have width and the seams are  
15 also inspected.

3. A method according to claim 1 or claim 2, in  
which seams which have a z-coordinate with respect to  
the x,y coordinates of the garment surface are detected  
20 by shadows and highlights from oblique illumination.

4. A method according to any one of claims 1 to 3,  
for inspecting Y-front underwear, which comprises panels  
edged with wide, raised seam and waistband structures,  
25 comprising the steps of :-

forming an image of the front of the garment  
laid flat,



- 15 -

locating on the image the outline of the garment,

locating on the image the edges of the wide,  
raised seam and waistband structures, and

5.

inspecting the panels and the wide, raised seam  
and waistband structures located on the image  
for faults.

10

5. A method according to claim 4, in which the  
garment is measured for sizing from the image of the  
front of the garment.

15

6. A method according to claim 4 or claim 5, in  
which the garment is illuminated with front lighting to  
form the image.

20

7. A method according to claim 6, in which the  
garment is illuminated with oblique lighting to locate  
the edges of the wide, raised seam and waistband  
structures and images thereof are superimposed on the  
image formed by front lighting.

25

8. Apparatus for automatically inspecting garments  
which have panels separated by seams comprising :-

imaging means for forming an image of the  
garment,

- 16 -

seam identifying means for identifying the seams  
on the image formed by the imaging means, and

5 panel inspection means for individually  
inspecting the panel areas on the said image.

9. Apparatus according to claim 8, in which the  
imaging means comprise an area scan video camera aimed  
at a background against which the garment can be laid  
10 flat and front and oblique lighting for a garment so  
laid against the background.

10. Apparatus according to claim 9, in which the  
seam identifying means comprise image processing means  
15 identifying highlights and shadows on an obliquely  
illuminated image and superimposing images thereof on a  
front-lit image of the garment.

11. Apparatus according to any one of claims 8 to  
20 10, in which the panel inspection means comprise image  
processing means adapted to identify a panel on the  
image and the same to detect faults therein according to  
predetermined criteria and to activate alarm or garment  
rejection arrangements upon fault detection.

25

12. Apparatus according to any one of claims 8 to  
11, in which the panel inspection means are arranged to




- 17 -

process each of a plurality of panels of the image sequentially.

13. Apparatus according to claim 12, comprising  
5 fault recording means adapted to record the occurrences  
of the faults associated with each of a plurality of  
panels on a batch inspection of similar garments.

14. Apparatus according to claim 13, comprising  
10 heuristic control means arranging the said plurality of  
panels in a sequence for inspection according to the  
incidence of faults for each panel recorded as the batch  
inspection progresses.

1/2

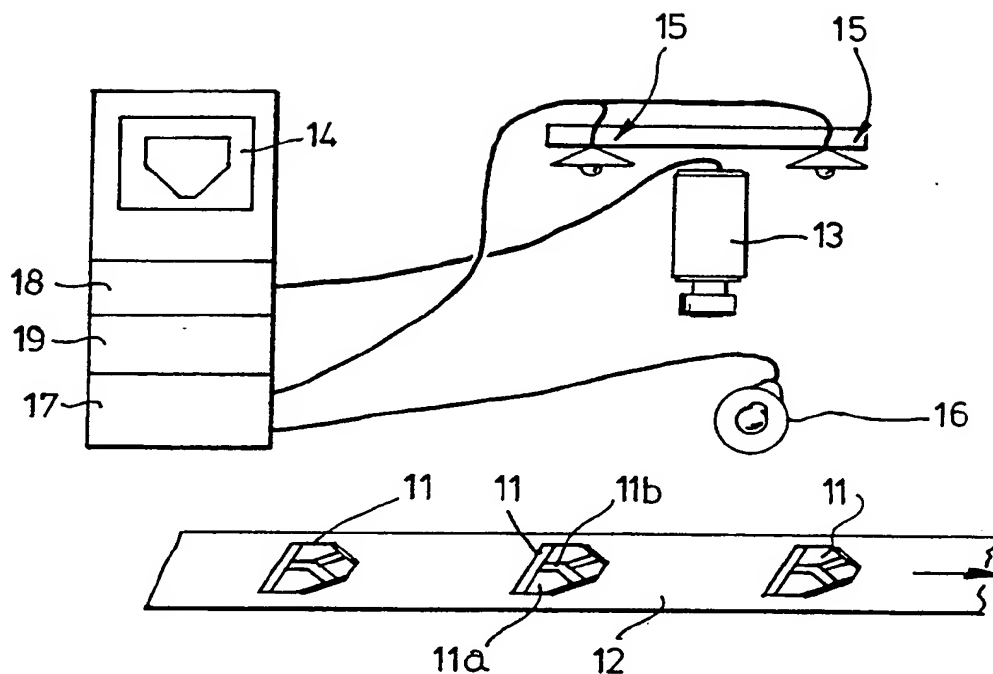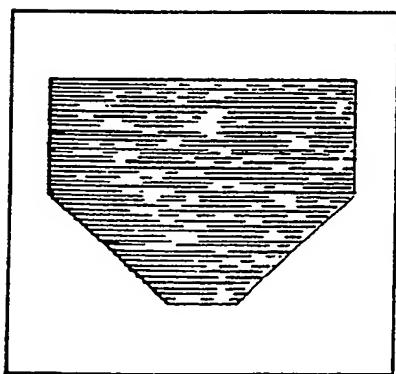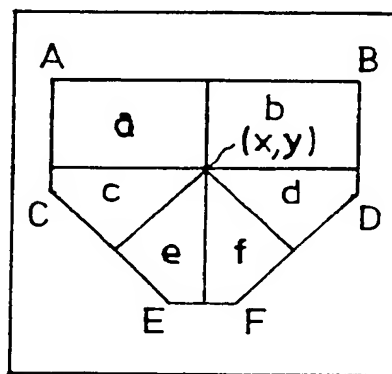FIG.1FIG.2FIG.3

SUBSTITUTE SHEET

2/2

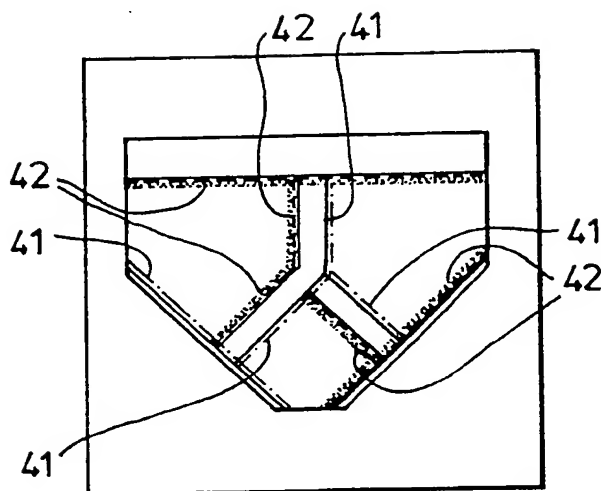


FIG. 4

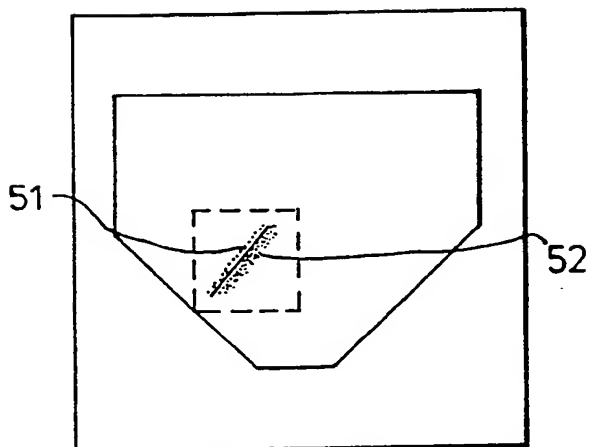


FIG. 5

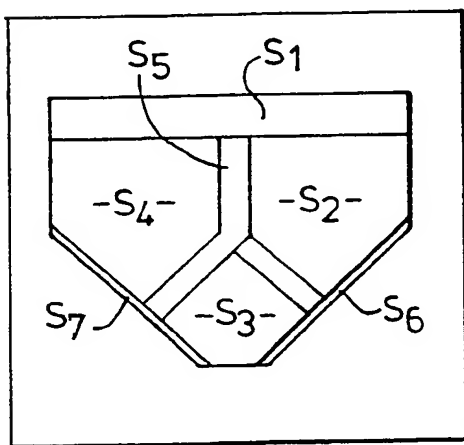


FIG. 6

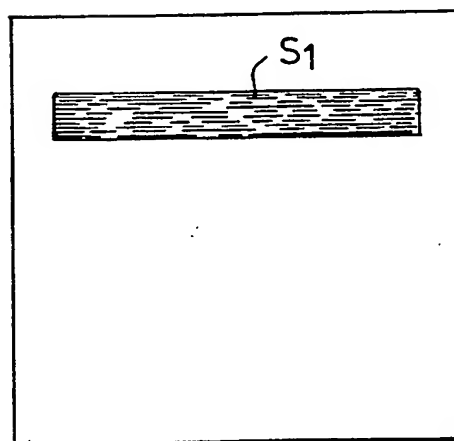


FIG. 7

SUBSTITUTE SHEET

# INTERNATIONAL SEARCH REPORT

International Application No PCT/GB 91/01414

<b>I. CLASSIFICATION OF SUBJECT MATTER</b> (If several classification symbols apply, indicate all) <sup>6</sup> According to International Patent Classification (IPC) or to both National Classification and IPC <b>IPC5: G 01 N 21/84; 33/36</b>														
<b>II. FIELDS SEARCHED</b> <div style="text-align: center; border-top: 1px solid black; border-bottom: 1px solid black;">Minimum Documentation Searched<sup>7</sup></div> <table style="width: 100%; border-collapse: collapse;"> <tr> <th style="width: 25%; border: 1px solid black;">Classification System</th> <th style="border: 1px solid black;">Classification Symbols</th> </tr> <tr> <td style="border: 1px solid black; height: 40px; vertical-align: bottom;">IPC5</td> <td style="border: 1px solid black; vertical-align: bottom;">G 01 N</td> </tr> </table> <div style="text-align: center; border-top: 1px solid black; border-bottom: 1px solid black;">Documentation Searched other than Minimum Documentation to the extent that such Documents are included in Fields Searched<sup>8</sup></div>			Classification System	Classification Symbols	IPC5	G 01 N								
Classification System	Classification Symbols													
IPC5	G 01 N													
<b>III. DOCUMENTS CONSIDERED TO BE RELEVANT<sup>9</sup></b> <table style="width: 100%; border-collapse: collapse;"> <tr> <th style="width: 10%; border: 1px solid black;">Category *</th> <th style="border: 1px solid black;">Citation of Document,<sup>11</sup> with indication, where appropriate, of the relevant passages<sup>12</sup></th> <th style="width: 15%; border: 1px solid black;">Relevant to Claim No.<sup>13</sup></th> </tr> <tr> <td style="border: 1px solid black; text-align: center; vertical-align: top;">A</td> <td style="border: 1px solid black; vertical-align: top;">GB, A, 2186365 (LEICESTER POLYTECHNIC) 12 August 1987, see abstract  --</td> <td style="border: 1px solid black; text-align: center; vertical-align: top;">1-14</td> </tr> <tr> <td style="border: 1px solid black; text-align: center; vertical-align: top;">A</td> <td style="border: 1px solid black; vertical-align: top;">EP, A1, 0363177 (GEC ELECTRICAL PROJECTS LIMITED) 11 April 1990, see abstract  --</td> <td style="border: 1px solid black; text-align: center; vertical-align: top;">1-14</td> </tr> <tr> <td style="border: 1px solid black; text-align: center; vertical-align: top;">A</td> <td style="border: 1px solid black; vertical-align: top;">DE, A1, 3640851 (TECHNISCHE HOCHSCHULE KARL-MARX-STADT) 19 June 1987, see abstract  --  -----</td> <td style="border: 1px solid black; text-align: center; vertical-align: top;">1-14</td> </tr> </table>			Category *	Citation of Document, <sup>11</sup> with indication, where appropriate, of the relevant passages <sup>12</sup>	Relevant to Claim No. <sup>13</sup>	A	GB, A, 2186365 (LEICESTER POLYTECHNIC) 12 August 1987, see abstract  --	1-14	A	EP, A1, 0363177 (GEC ELECTRICAL PROJECTS LIMITED) 11 April 1990, see abstract  --	1-14	A	DE, A1, 3640851 (TECHNISCHE HOCHSCHULE KARL-MARX-STADT) 19 June 1987, see abstract  --  -----	1-14
Category *	Citation of Document, <sup>11</sup> with indication, where appropriate, of the relevant passages <sup>12</sup>	Relevant to Claim No. <sup>13</sup>												
A	GB, A, 2186365 (LEICESTER POLYTECHNIC) 12 August 1987, see abstract  --	1-14												
A	EP, A1, 0363177 (GEC ELECTRICAL PROJECTS LIMITED) 11 April 1990, see abstract  --	1-14												
A	DE, A1, 3640851 (TECHNISCHE HOCHSCHULE KARL-MARX-STADT) 19 June 1987, see abstract  --  -----	1-14												
<table style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 50%; vertical-align: top;"> <b>* Special categories of cited documents:<sup>10</sup></b>  <b>"A"</b> document defining the general state of the art which is not considered to be of particular relevance  <b>"E"</b> earlier document but published on or after the international filing date  <b>"L"</b> document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)  <b>"O"</b> document referring to an oral disclosure, use, exhibition or other means  <b>"P"</b> document published prior to the international filing date but later than the priority date claimed             </td> <td style="width: 50%; vertical-align: top;"> <b>"T"</b> later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention  <b>"X"</b> document of particular relevance, the claimed invention cannot be considered novel or cannot be considered to involve an inventive step  <b>"Y"</b> document of particular relevance, the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.  <b>"&amp;"</b> document member of the same patent family             </td> </tr> </table>			<b>* Special categories of cited documents:<sup>10</sup></b> <b>"A"</b> document defining the general state of the art which is not considered to be of particular relevance <b>"E"</b> earlier document but published on or after the international filing date <b>"L"</b> document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) <b>"O"</b> document referring to an oral disclosure, use, exhibition or other means <b>"P"</b> document published prior to the international filing date but later than the priority date claimed	<b>"T"</b> later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention <b>"X"</b> document of particular relevance, the claimed invention cannot be considered novel or cannot be considered to involve an inventive step <b>"Y"</b> document of particular relevance, the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art. <b>"&amp;"</b> document member of the same patent family										
<b>* Special categories of cited documents:<sup>10</sup></b> <b>"A"</b> document defining the general state of the art which is not considered to be of particular relevance <b>"E"</b> earlier document but published on or after the international filing date <b>"L"</b> document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) <b>"O"</b> document referring to an oral disclosure, use, exhibition or other means <b>"P"</b> document published prior to the international filing date but later than the priority date claimed	<b>"T"</b> later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention <b>"X"</b> document of particular relevance, the claimed invention cannot be considered novel or cannot be considered to involve an inventive step <b>"Y"</b> document of particular relevance, the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art. <b>"&amp;"</b> document member of the same patent family													
<b>IV. CERTIFICATION</b> <table style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 50%; border: 1px solid black; vertical-align: top;">                 Date of the Actual Completion of the International Search   <b>1st November 1991</b> </td> <td style="width: 50%; border: 1px solid black; vertical-align: top;">                 Date of Mailing of this International Search Report   <b>27 NOV 1991</b> </td> </tr> <tr> <td style="border: 1px solid black; vertical-align: top;">                 International Searching Authority   <b>EUROPEAN PATENT OFFICE</b> </td> <td style="border: 1px solid black; vertical-align: top;">                 Signature of Authorized Officer   <b>K. S. T. JAZELAAR</b> </td> </tr> </table>			Date of the Actual Completion of the International Search  <b>1st November 1991</b>	Date of Mailing of this International Search Report  <b>27 NOV 1991</b>	International Searching Authority  <b>EUROPEAN PATENT OFFICE</b>	Signature of Authorized Officer  <b>K. S. T. JAZELAAR</b>								
Date of the Actual Completion of the International Search  <b>1st November 1991</b>	Date of Mailing of this International Search Report  <b>27 NOV 1991</b>													
International Searching Authority  <b>EUROPEAN PATENT OFFICE</b>	Signature of Authorized Officer  <b>K. S. T. JAZELAAR</b>													

Form PCT/ISA/210 (second sheet) (January 1985)

**ANNEX TO THE INTERNATIONAL SEARCH REPORT  
ON INTERNATIONAL PATENT APPLICATION NO. PCT/GB 91/01414**

SA 50702

This annex lists the patent family members relating to the patent documents cited in the above-mentioned international search report. The members are as contained in the European Patent Office EDP file on 27/09/91. The European Patent office is in no way liable for these particulars which are merely given for the purpose of information.

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
GB-A- 2186365	12/08/87	DE-A- 3426056	24/01/85
		GB-A-B- 2144219	27/02/85
		GB-A-B- 2192276	06/01/88
		US-A- 4744035	10/05/88
EP-A1- 0363177	11/04/90	GB-A- 2225652	06/06/90
DE-A1- 3640851	19/06/87	NONE	

For more details about this annex : see Official Journal of the European patent Office, No. 12/82

EPO FORM P0479

This Page Blank (uspic,



**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☒ **BLACK BORDERS**
- ☒ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☒ **SKewed/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☒ **GRAY SCALE DOCUMENTS**
- ☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☒ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**

**This Page Blank (uspto)**